



WATCH VIDEO



K1814-SY

Roll To Roll Double Head Laser Cutting Machine

INTRODUCTION

KASU K1814-SY roll to roll double head laser cutting machine with conveyor belt can auto cut roll to roll plain fabrics and PU leather.

The two heads of KASU K1814-SY laser cutting machine can simultaneously cut the different shapes of patterns in plain fabrics with super high speed.

Compared with the double head laser cutting machine with single guide rail K1814-S2, the double heads of KASU's

Effective Working Area:

Vision: 1800MM*1400MM


Machine Size: 2420*2230*1120MM

K1814-SY are installed in dual separate guide rails. It supports simultaneous cutting of both single-pattern layouts and combined-pattern layouts.

APPLICATIONS



Toy and Craft

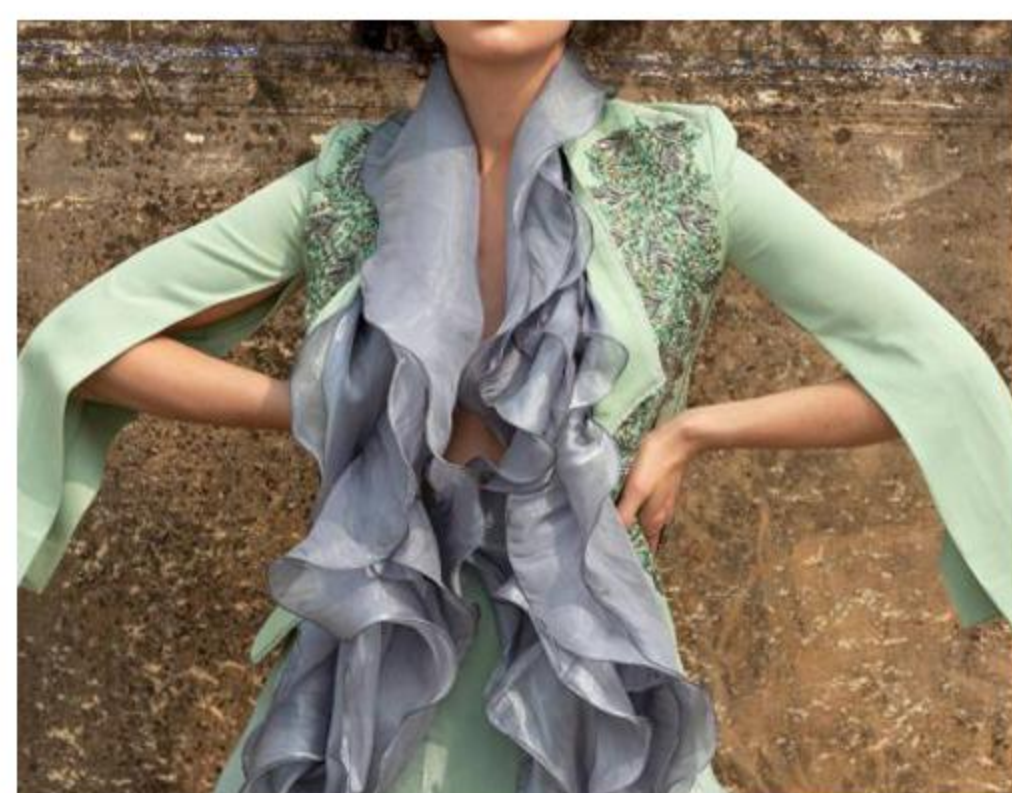

Apparel



Shoe and Bag



Home Textile




Outdoor



Composite



PU and PVC

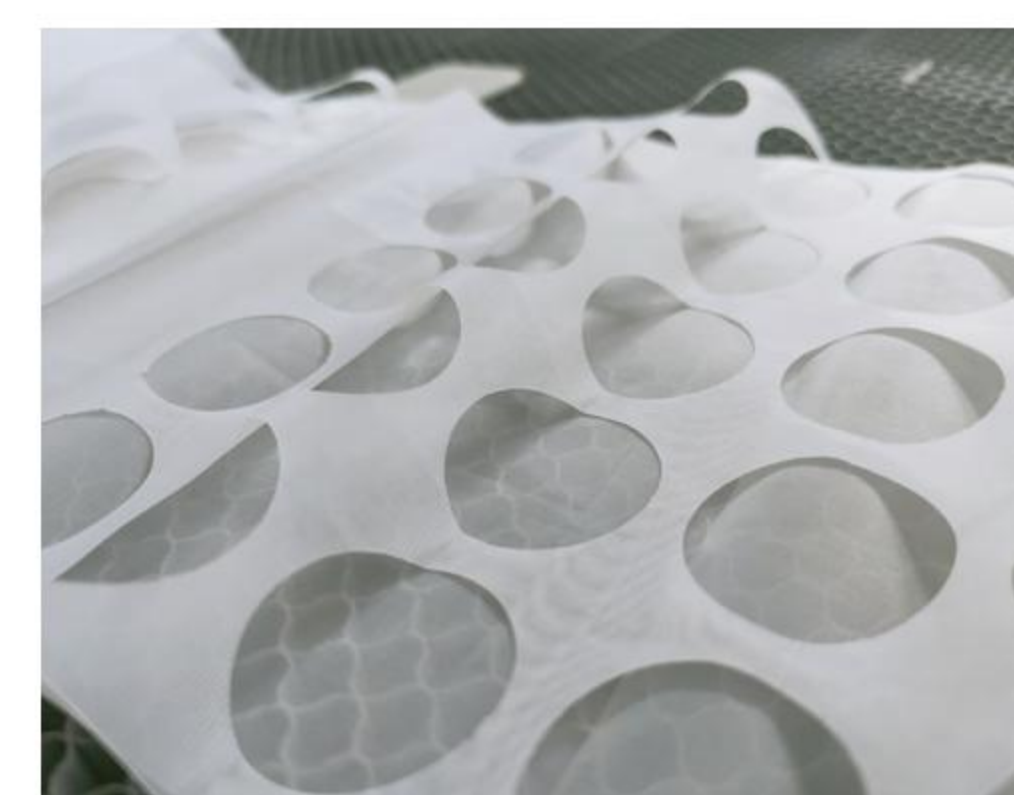

Fabric

■ KEY FEATURES



Bigger Cutting Area,
Same Cutting Precision



Doubled Cutting Efficiency,
Higher Productivity



Multi Cutting Functions



Stable and
24 Hours Running



Super Simple
to Operate

■ Smart Laser Control System

While using KASU K1814-SY roll to roll double head laser cutter, only CAD design files are necessary, and you can design as your wish. The smart laser control software can make the whole cutting process highly automatic. It supports oversized pattern continuous cutting function, too.




■ Dual-Heads With Dual-Guidrails




After importing the nesting layout of patterns into our smart laser control software, the two laser heads can automatically move to specific positions cutting different shapes of patterns at the same time. 0mm pattern cutting space helps save more materials than the manually adjusted laser head unit.

■ Auto Feeding Conveyor Table

K1814-SY is equipped with a chain conveyor belt, which can auto-feed the roll material right after the laser cutting process. With the optional active feeder, the operator only needs to take care of the cut pattern pick-up job.

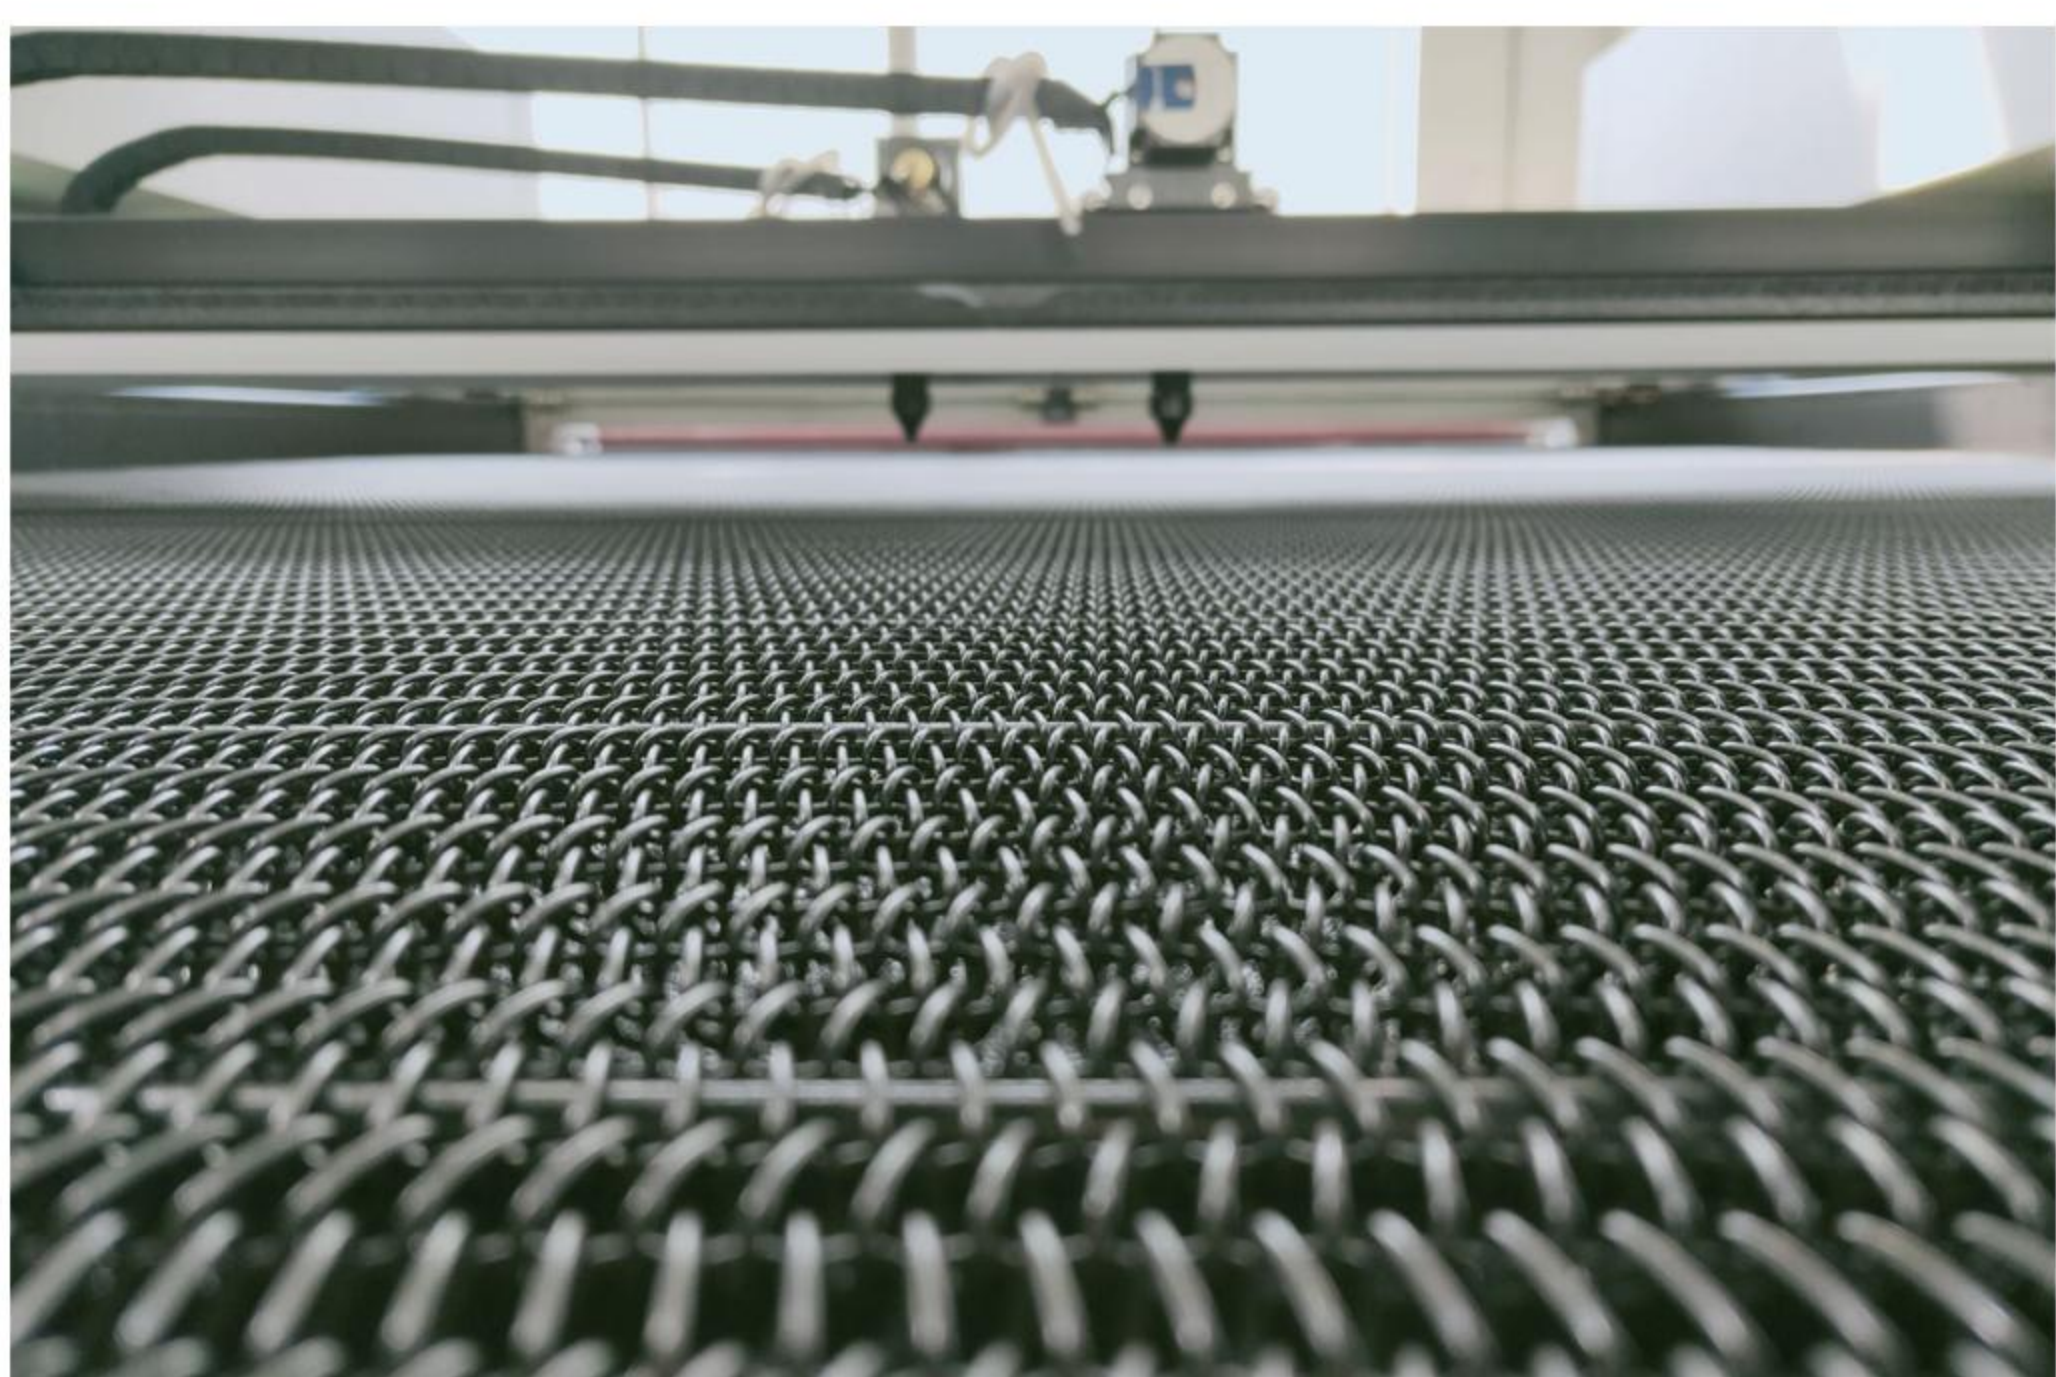

■ Three-Axis Structure Design

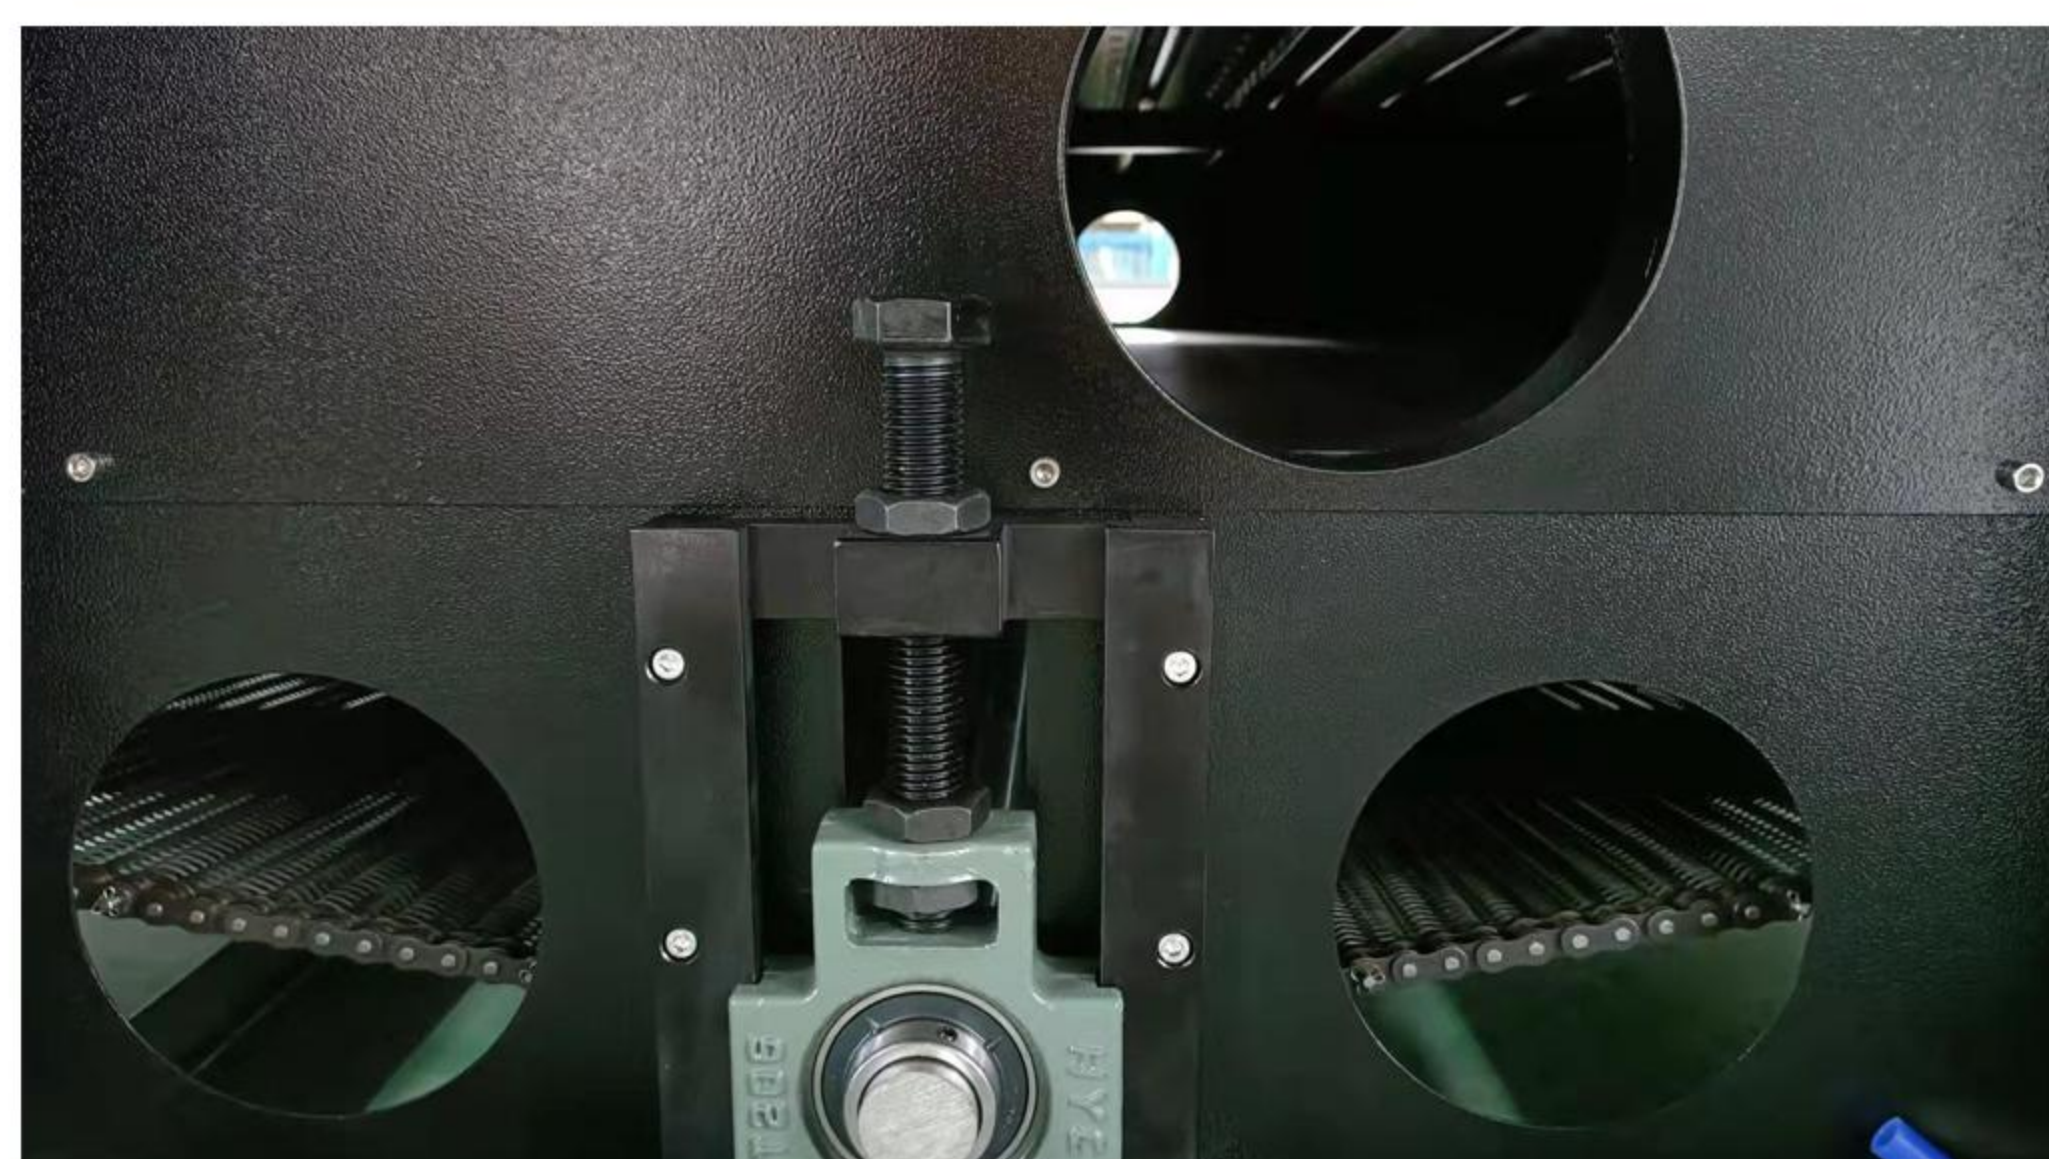


The triangle structure is more stable and more convenient to adjust the conveyor belt. Reasonable cavity design enhances the effect of fume exhausting. And it offers bigger room than two-axis structure and reduce the risk of potential fires. Also bigger room makes the dust exhausting job much easier for you.

■ TOP QUALITY SPARE PARTS



Control Card

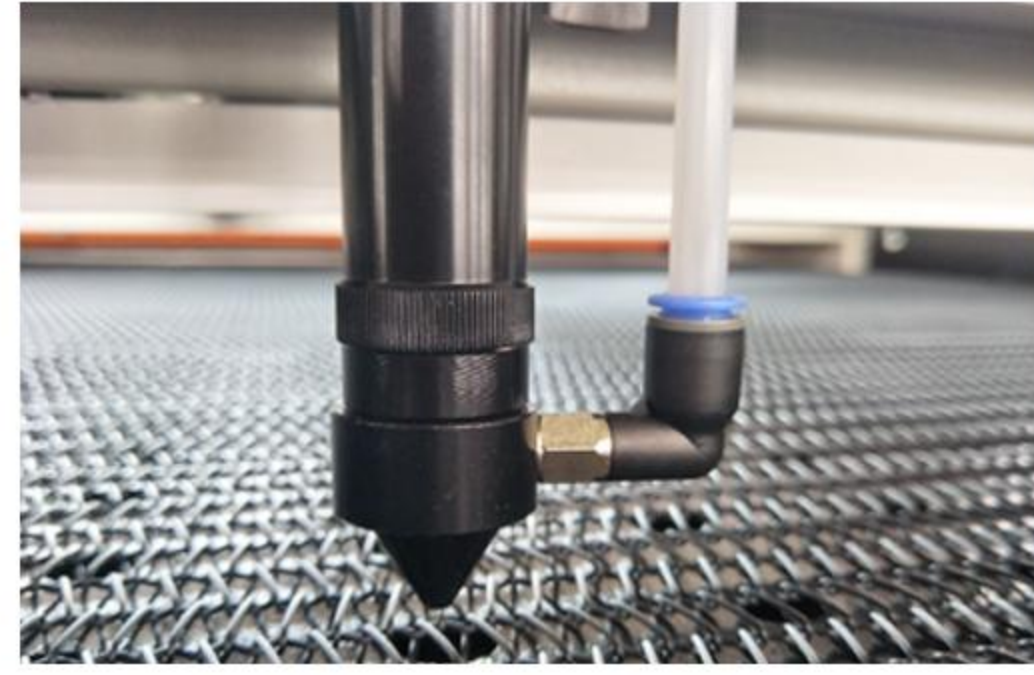

Cutting Head



Glass Tube



Laser Power



AC Water Chiller



Exhausting Fan



Air Pump




Lense



Stainless Steel Screw



Motion Module

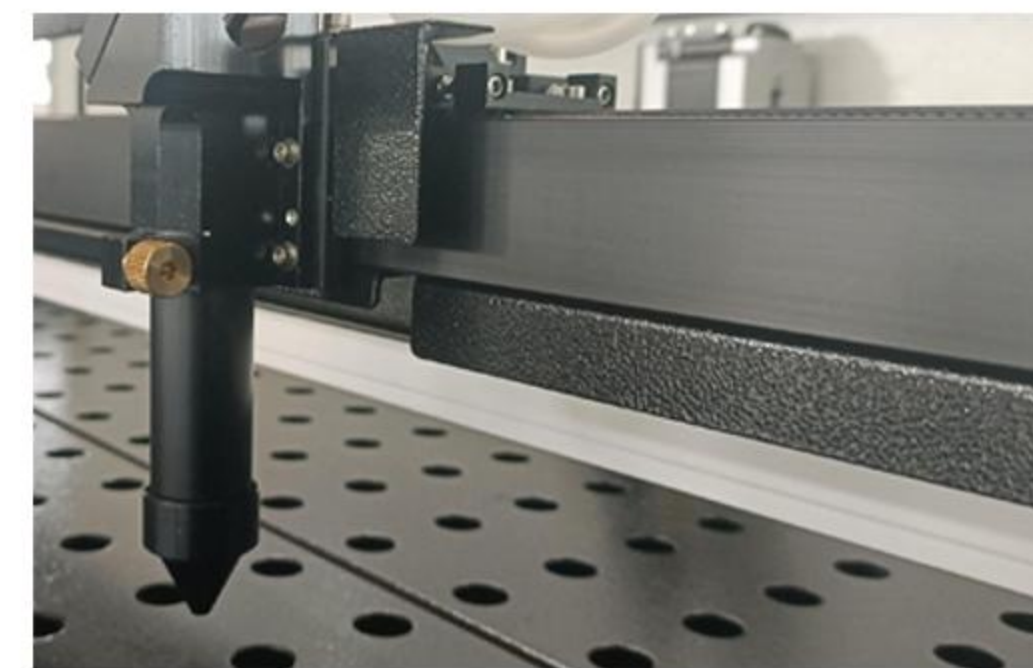

Guide Rail




Spare Parts Tool Kit

To keep your laser cutter running for years, we provide you high quality spare parts verified by our QC process. And we offer replacing spare parts to our clients at COST PRICE just to ensure you have the best using experience and lowest maintenance cost.

■ SAFETY DESIGN

Following the safety standards, we try everything to make a reliable machine to protect both your operator and your laser machine.

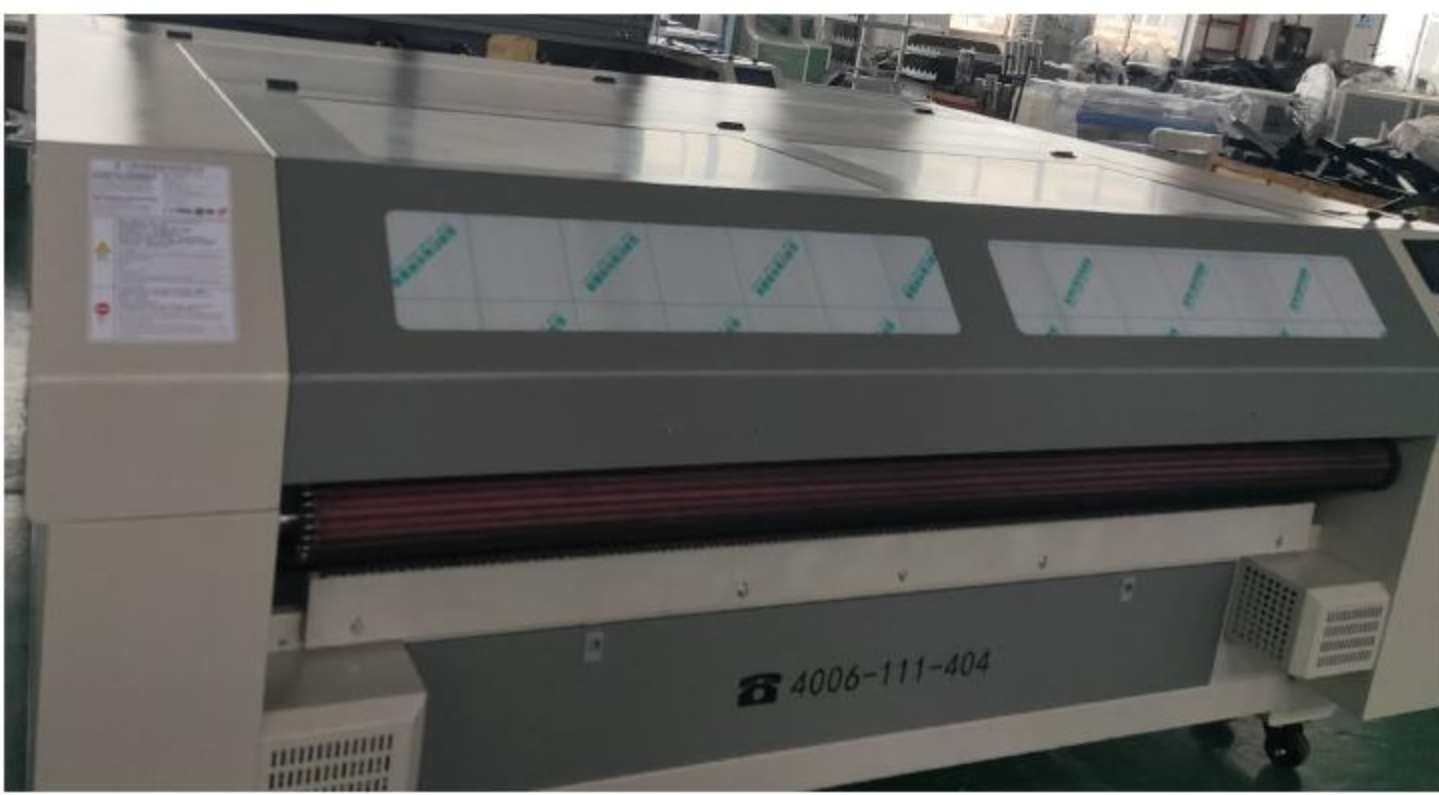

All-Round Safe Cover



Alarm Lamp




Emergency Button



Switch Built-in Design



High-Voltage Wire Insulation

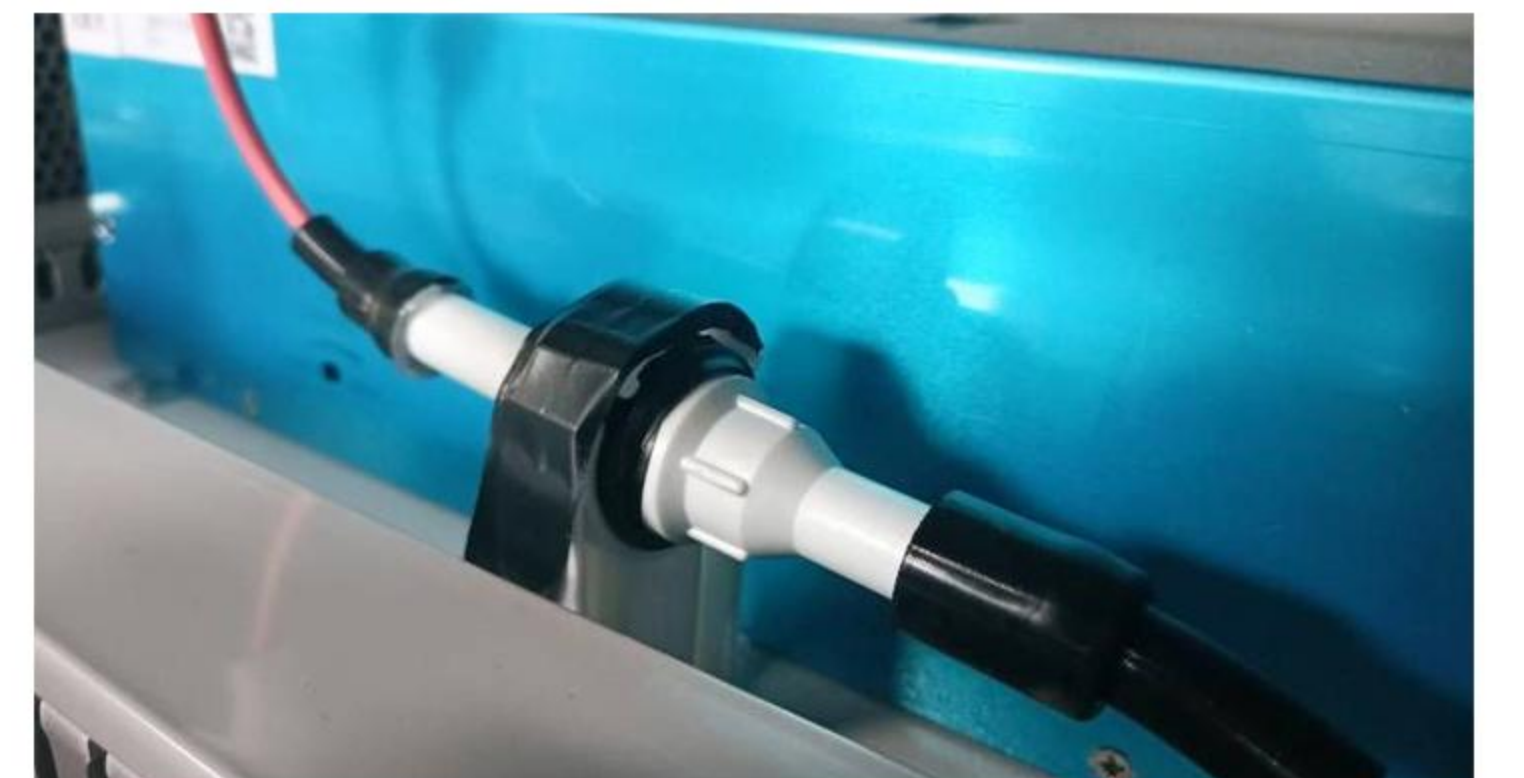

Insulation Support Frame



Notification Stickers



Wire Protection




Connector Insulation



WATCH VIDEO

AUTO ACTIVE FEEDER

Machine Size: 2210mm*530mm*920mm

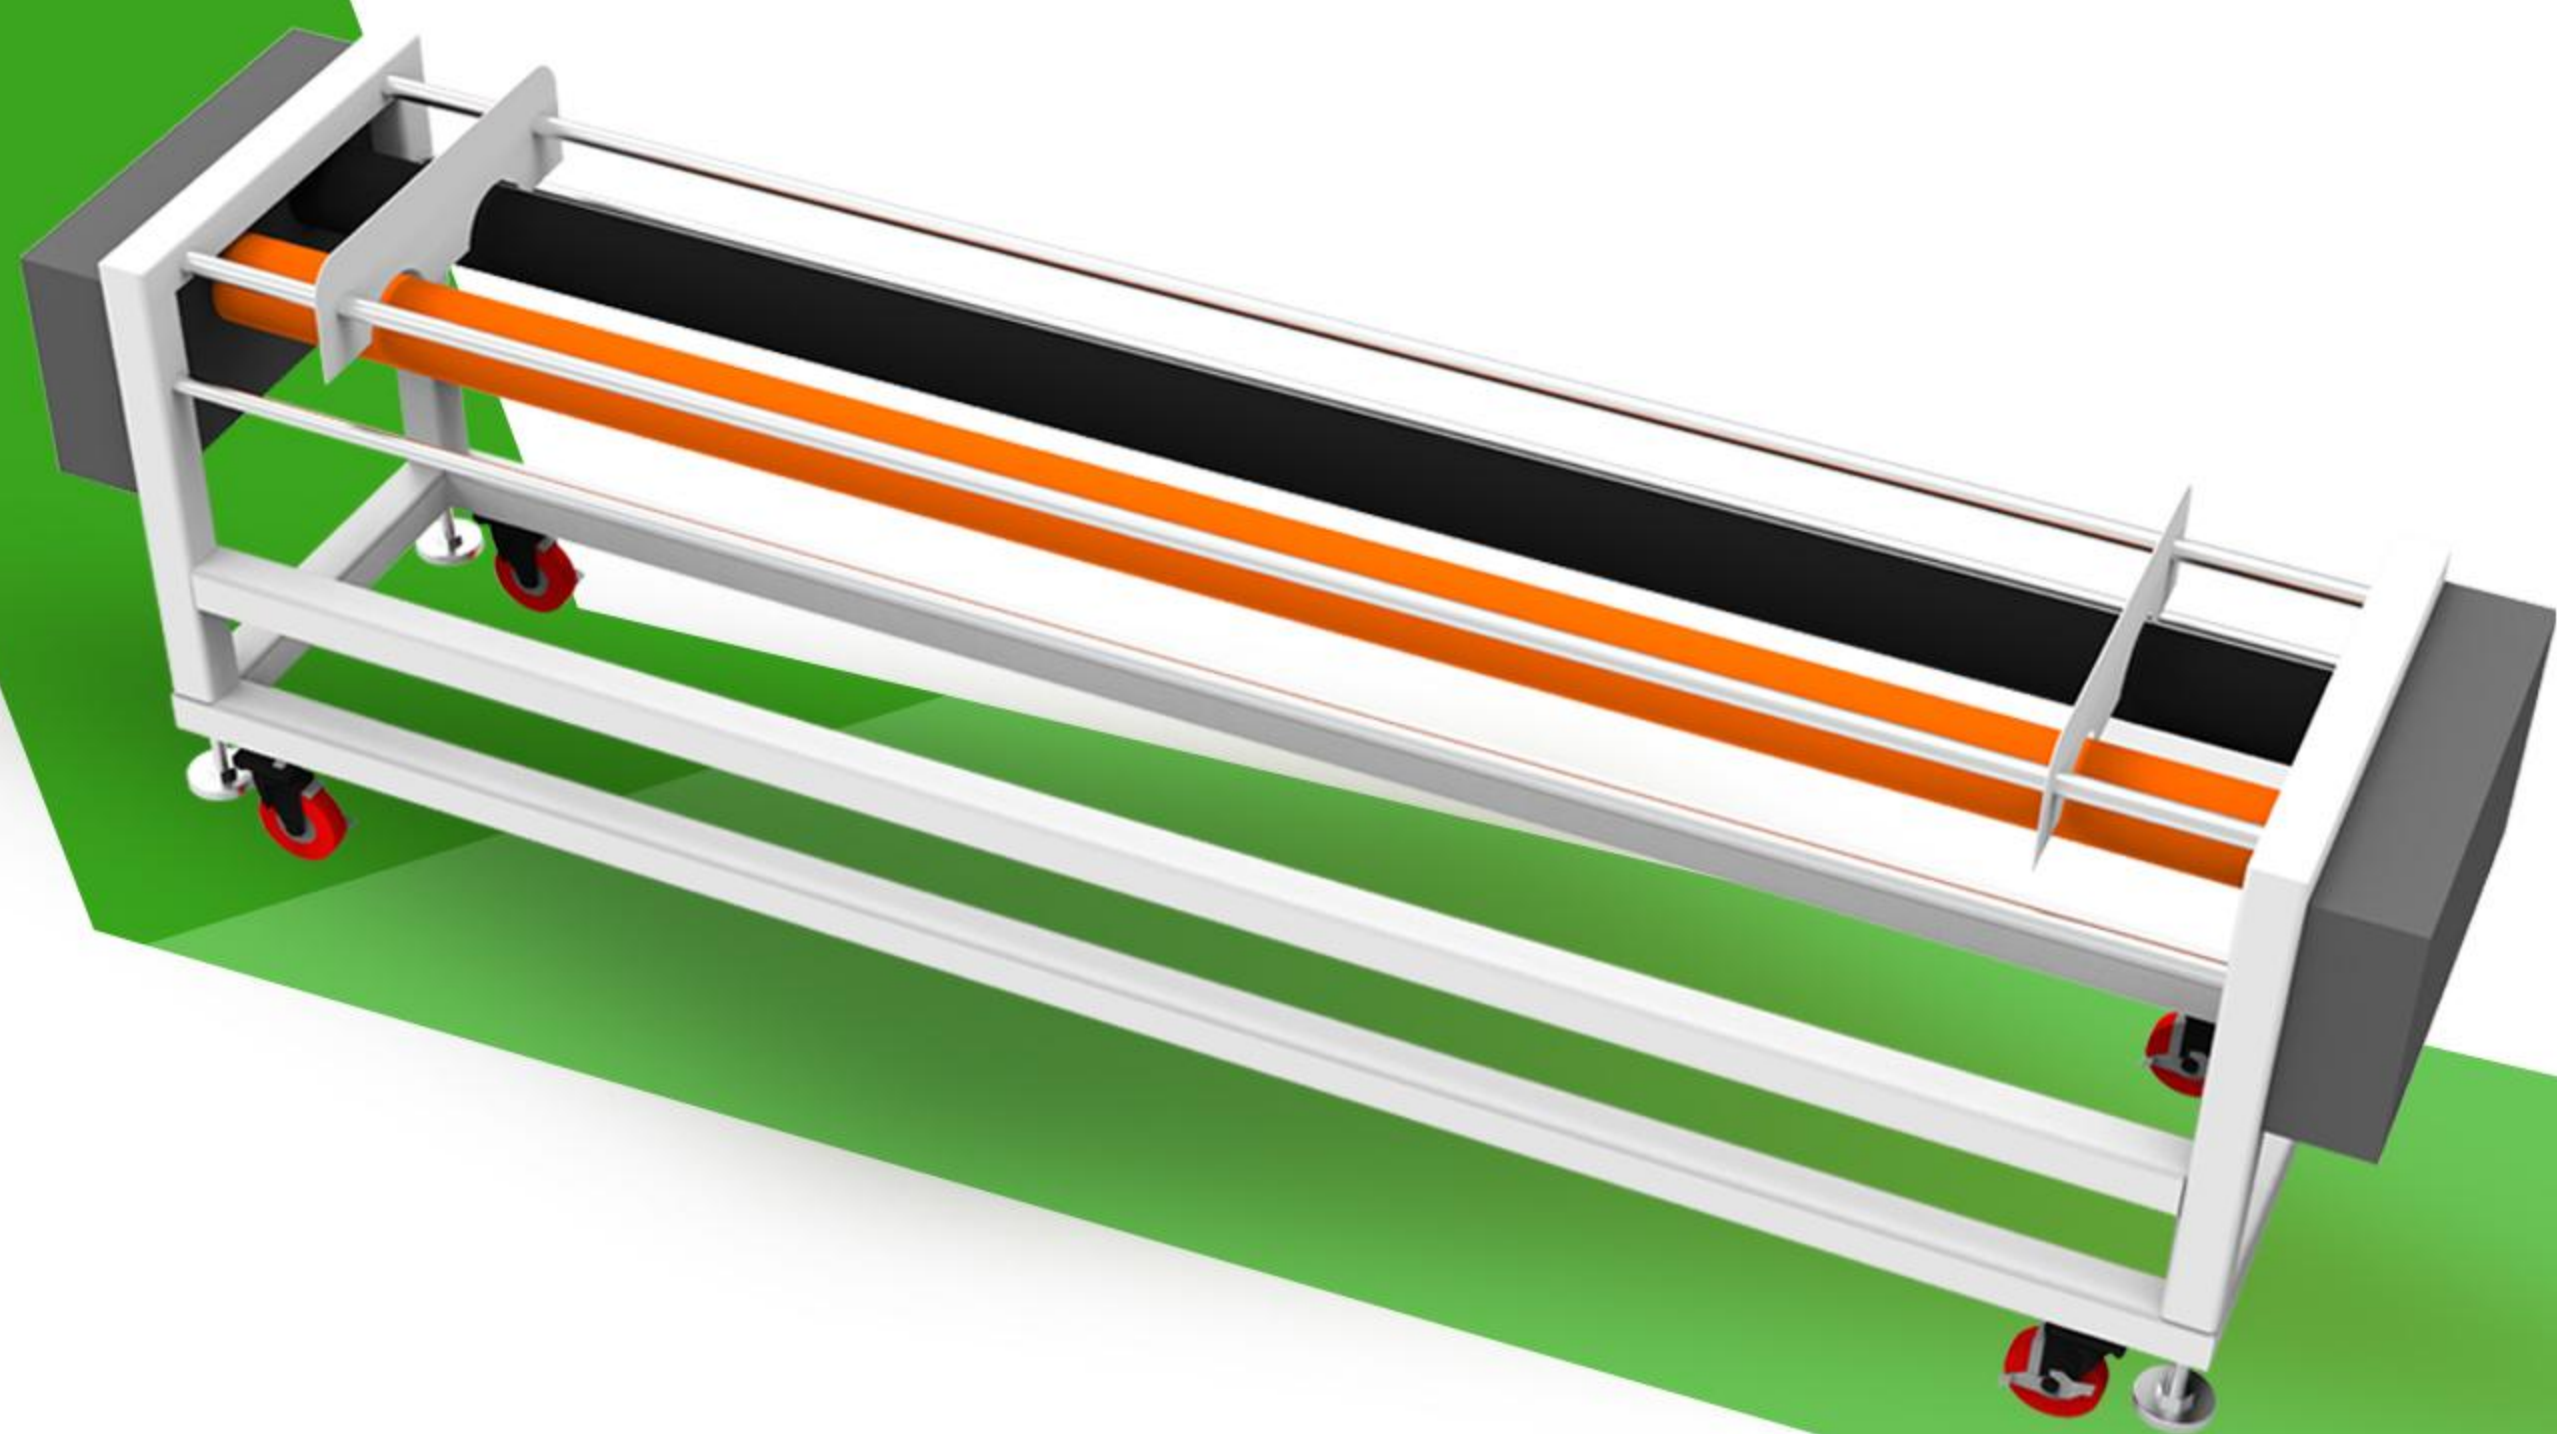

INTRODUCTION


KASU's automatic active feeder is specially designed for auto-feeding roll-to-roll fabric or other soft materials. Reasonable structural design can be adapt to a variety of fabrics.

It is equipped with high sensitivity sensor switch to sense the presence or absence of the materials and then decide to start feeding or stop. It has an independent control system and can be connected to any brand of the laser machine. Branded motion system and other quality electric spare parts can ensure 24 hours stable running.


KEY FEATURES



High Temperature Hardened Steel Frame Structure

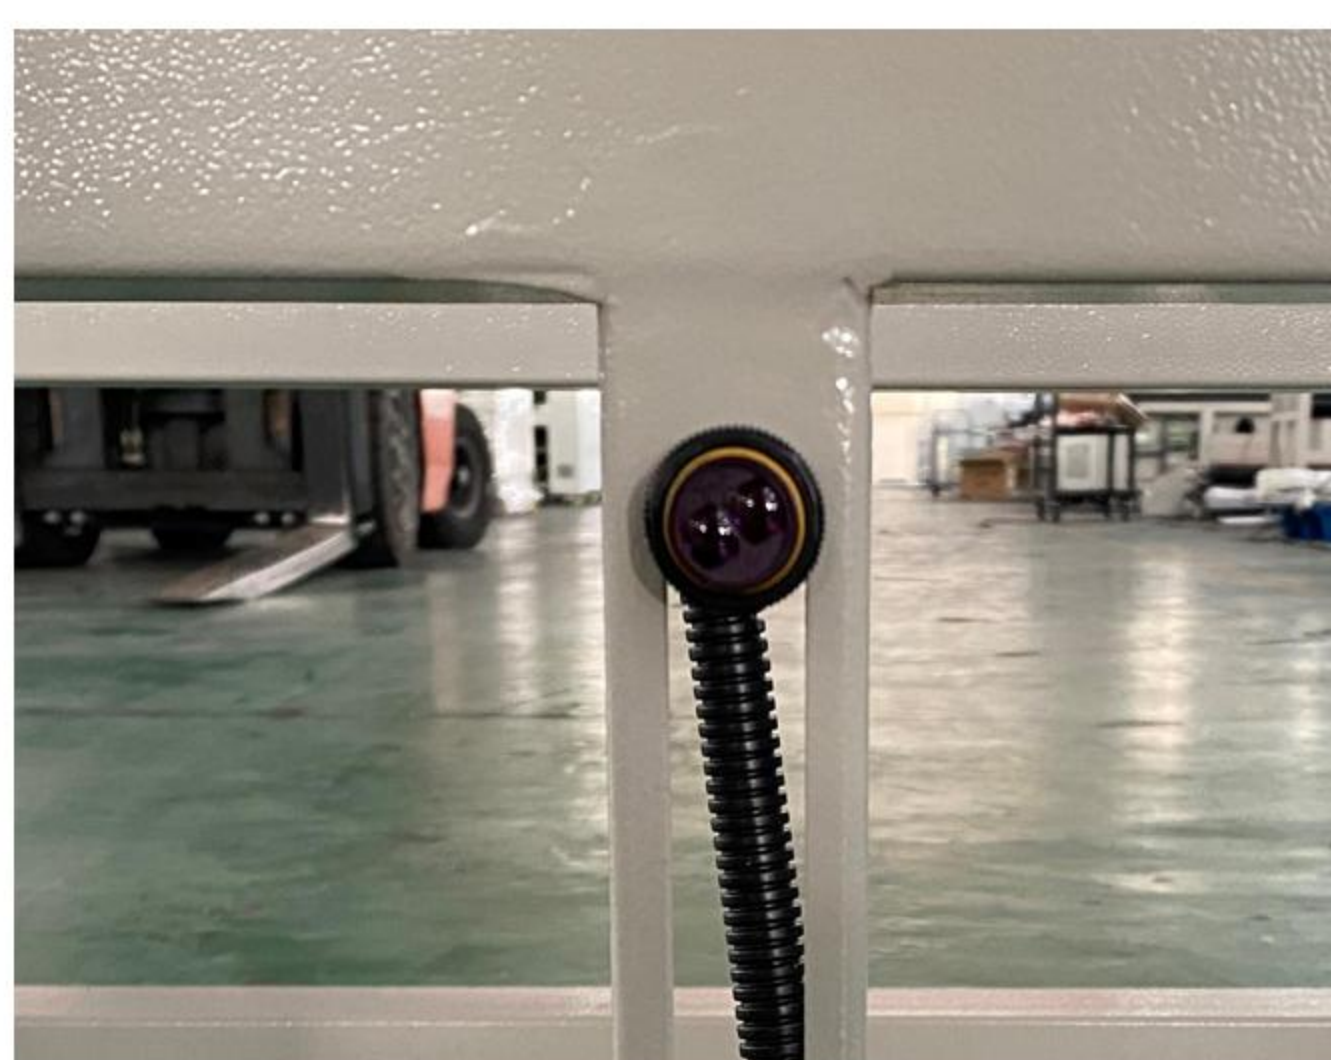


High Sensitivity Sensor Switch

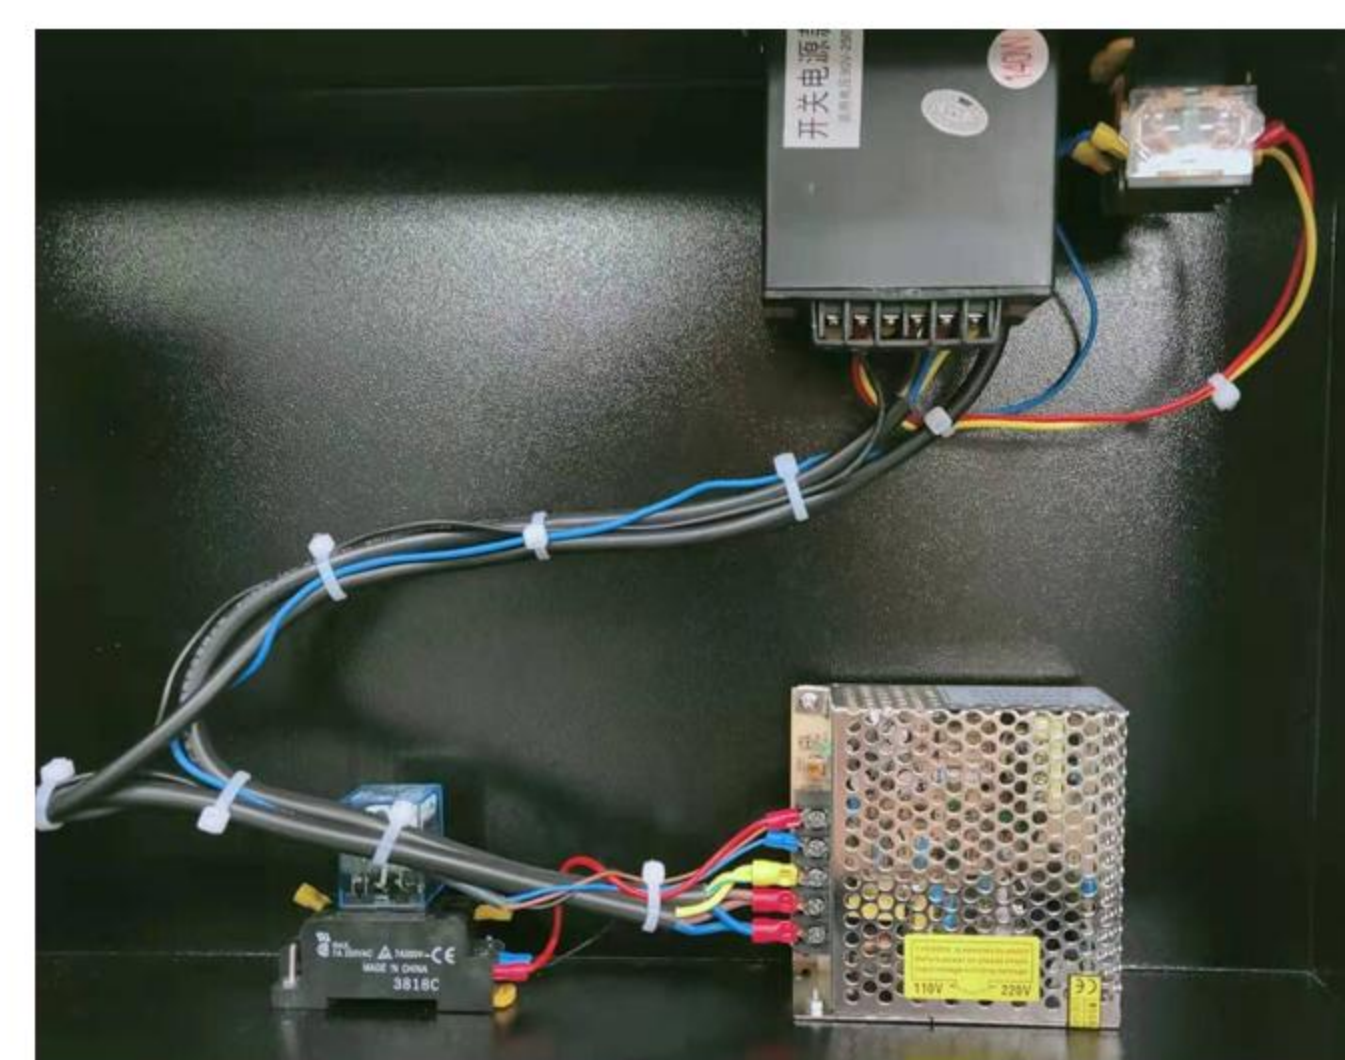

Independent Control Board



Width Adjustable Fabric Stopper

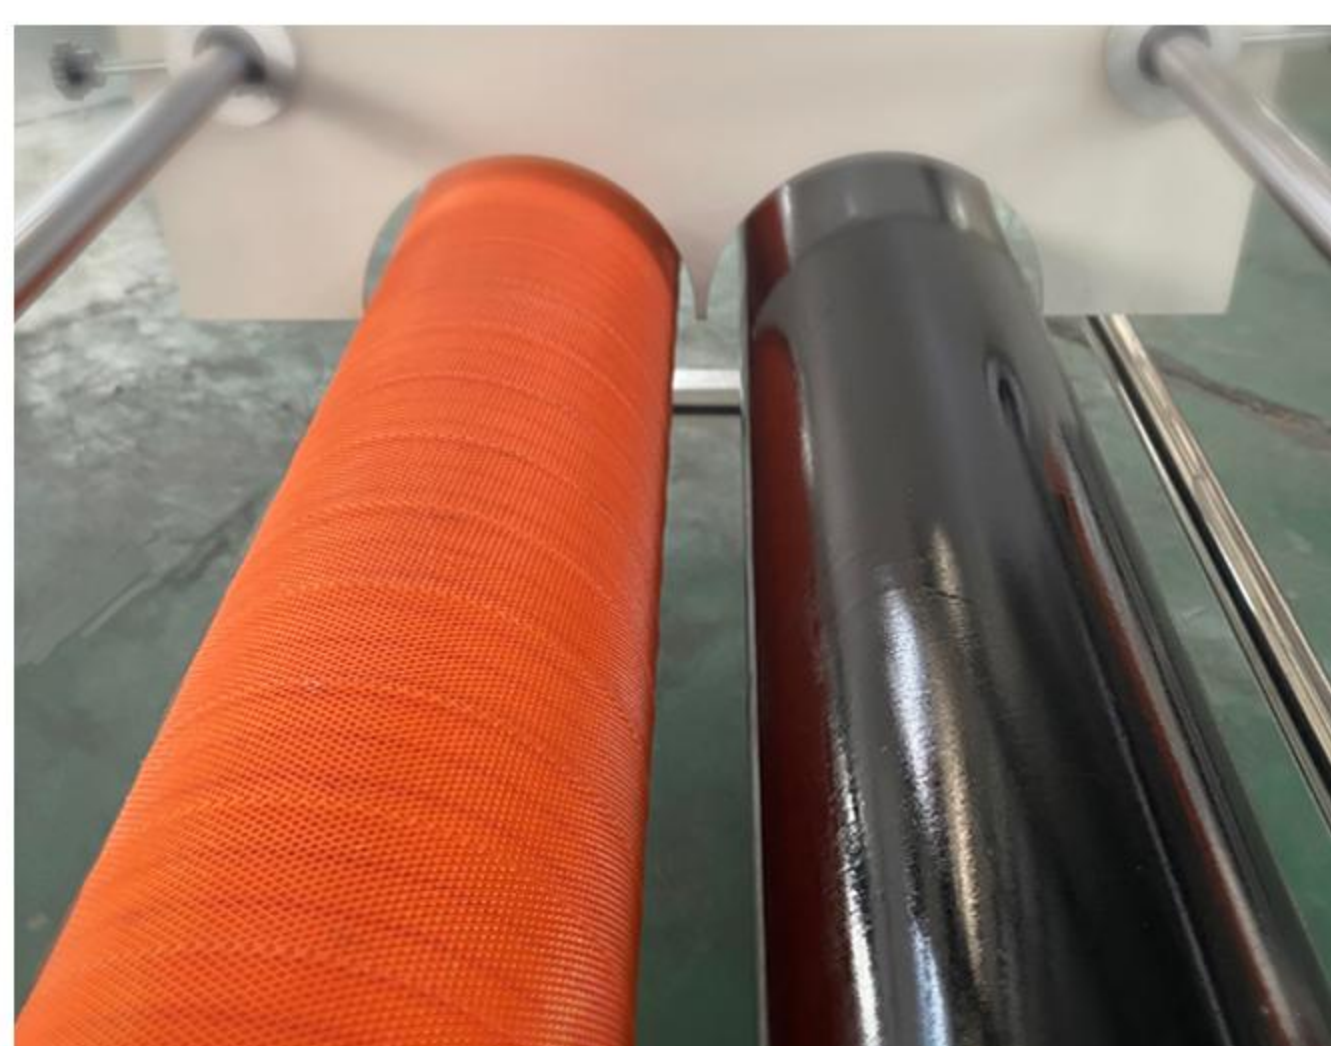

Well Designed Fabric Roller With Friction




Strong Universal Wheels & Machine Feet

OPTIONAL DEVICES



Top Canon Camera

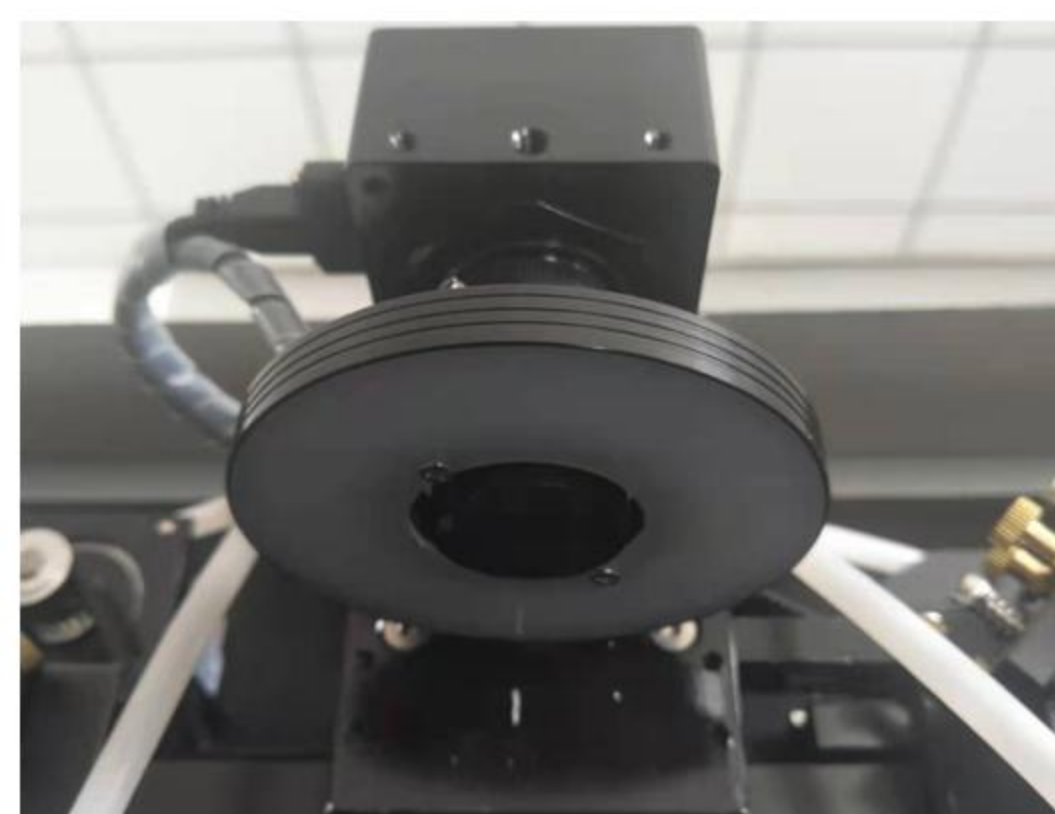

Small CCD Camera



Active Feeder



Extended Pick-up Table

MACHINE PARAMETERS

Working Area	1800MM*1400MM	Software	KASU
Laser Type	Glass CO2 Laser Tube	Working Speed	<1000 MM/S
Laser Power	80/100/130/150W	Power Supply Requirements	AC220V±5% 50Hz/60Hz 1Phase
Heads of Laser	Double Heads	Format Supported	AI\BMP\PLT\DXF\DST
Dimensions with Wood Package	2.28*2.5*1.32M / 1.68*0.46*0.73M	Positioning Accuracy	±0.1MM
Gross Weight	1050KG	Operating Temperature	minus 10°C~45°C
Motion System	Hybrid Step-Servo Motor	Operating Humidity	5-95%
Cooling System	5200 Industrial Water Chiller	Total Power	<1.5KW (Excluding exhauster)

SUCCESSFUL STORIES



CONTACT US



WECHAT



WHATSAPP

Contact us now and get a live demo of how our digital cutting solutions help increase your cutting workshop productivity and efficiency.

✉ Email: kasu@kasulaser.com
 🌐 www.kasulaser.com / www.kasucutter.com
 🏢 Shanghai KASU Intelligent Technology Co., Ltd.

🏠 Suzhou KASU Intelligent Equipment Co., Ltd.
 📍 Factory: No. 20, Jiangnan Road, Taicang, Suzhou, Jiangsu, China